

# LED Flexible Display Screen

## P6 32\*144 Series

### BP-P6-32144-FSB-1921M3-05C-001







#### **Features**

- 1. 32x144 pixels resolution for crisp visuals, ultra-thin and flexible.
- 2. IP54-rated PU-coated screen resists dust, splashes, and humidity, ensuring reliability in dry or damp environments.
- 3. Rollable construction enables compact storage and portability.
- 4. Low-power DC 5V Type-C driven, compatible with most USB adapters and power banks.
- 5. Bluetooth-enabled smartphone app for wireless content management: upload text, animations, or custom graffiti, adjust brightness, scrolling speed, schedule displays.
- 6. Multi-mode display: choose static, scrolling, or animated effects. Customizable content library supported.
- 7. Peel-and-stick adhesive backing for instant mounting on clean, dry surfaces (glass, tile, metal).

### **Application**

-. Ideal for: Retail promotions, event signage, smart home decor, hospitality messaging, and portable advertising solutions.


























# LED Flexible Display Screen

## Specification

P6 32*144 Series	Input Voltage:	DC 5V	
BP-P6-32144-FSB-1921M3-05C-001	Max. Power:	15W	
L892×W232×H3mm [L35.11×W9.13×H0.12in.]	Power Mode:	Туре-С	
32×144 pixels	Control:	Smartphone APP+Bluetooth	
P6 (6mm)[0.24in.]	Minimum Bending Diameter:	100mm[3.94in.]	
1921RGB		Chinese, Traditional Chinese, English, German, French, Russian, Italian, Portuguese, Spanish, Thai, Indian, Vietnamese, Korean, Japanese, Arabic	
IP54 PU glue dripping process	App languages:		
-20°C ~ 45°C [-4~113°F]	7 455 -23900900		
	BP-P6-32144-FSB-1921M3-05C-001  L892×W232×H3mm [L35.11×W9.13×H0.12in.]  32×144 pixels  P6 (6mm)[0.24in.]  1921RGB  IP54 PU glue dripping process	BP-P6-32144-FSB-1921M3-05C-001         Max. Power:           L892×W232×H3mm [L35.11×W9.13×H0.12in.]         Power Mode:           32×144 pixels         Control:           P6 (6mm)[0.24in.]         Minimum Bending Diameter:           1921RGB         IP54 PU glue dripping process           App Languages:	

#### **Dimension**

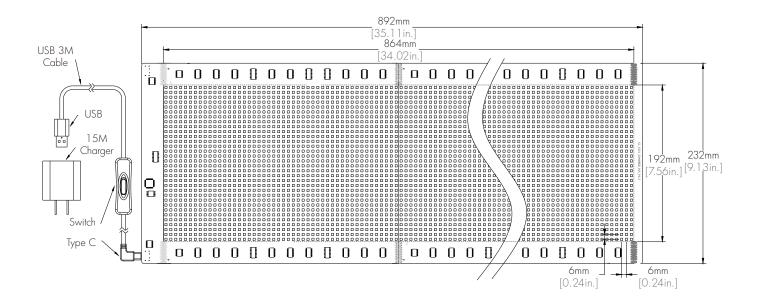



# LED Flexible Display Screen

#### List



### Package



Part No.	Color Box Dimension	Product Overall Weight	Carton Dimension	Quantity Per Carton	Total Weight
BP-P6-32144-FSB-1921M3-05C-001	L135×W135×H248mm [L5.31×W5.31×H9.76in.]	1320±50g	L420×W420×H270mm [L16.54×W16.54×H10.63in.]	9 sets	12.89±0.5kg

#### **Notice**

- 1. Please read the attached "User Manual" before using this product.
- 2. Please use DC 5V USB or DC 5V power suppply to drive this product, otherwise the product will work improperly or damage the product.
- 3. Do not excessively bend or forcefully tear the screen, it may damage the screen circuit.
- 4. Before pasting or installing, ensure that the installation surface of the pasted position is clean and dry.
- 5. Connect the power supply first, and then turn on the power switch, do not quickly repeat the switch more than 2 times within 3 seconds.
- 6. Power on the device first, and then open the app to search for the device after the screen lights up.
- 7. Do not pair through the Bluetooth setting menu, simply open the app to connect the device directly.
- $8.\,\mathrm{The}$  operation interface of APP varies from different size of products.

#### Edition

Release Date	Issuance of Category
2025.02.20	The 1st. Version

